TINARELLI S.R.L.
COSTRUZIONI MACCHINE AUTOMATICHE
Via A. Maccaferri 4 - 40069 Zola Predosa (BO) ITALY
Tel. +39 051-751400 email : info@tinarellisrl.com
website : www.tinarellisrl.com

P.Iva IT00670511203 - Cod.Fisc. 03866160371
R.E.A. 321418 - Reg.Imp. BO51490 - Cap.soc. Euro 10.710,00 i.v.

CF5

MACCHINA PER IL FISSAGGIO A VAPORE DI CALZE / COLLANT / CALZAMAGLIA

FULL-BOARDING MACHINE FOR STOCKINGS AND COTTON/ACRYLIC PANTYHOSES

Macchina per il fissaggio CF5	Full Boarding machine CF5
Macchina dedicata al fissaggio a vapore di calze e calzamaglie. Sistema a 15 coppie di forme. Carico e sistemazione del piede in manuale. Tenditore automatico della calza + stecche (alte o basse) blocca corpino. Camera a vapore in pressione fino a 3 BAR. Asciugatura a vapore. Macchina robusta e semplice su cui sono montati componenti all'avanguardia. Tutte le regolazioni vengono effettuate elettronicamente da pannello di controllo touch-screen in modo molto semplice dall'operatore. Cambio forme semplice e veloce. Gruppi Opzionali : * Gruppo aspirapunte al carico * Cesto raccoglitore per accumulo calze * Uscita calze impilate su nastro	Full-Boarding machine designed for stockings and cotton/acrylic pantyhoses The machine is complete of 15 sets of forms. Manual loading and manual foot placing. Automatic and programmable positioning arms + guides (top and bottom) to fold and fix the gusset. Steam chamber with pressure up to 3 BAR Drying with steam The machine is of a sturdy construction using hi-tech components. All settings and operation functions are electronically made from a touch-screen control panel in a very simple way for the operator. Quick and easy forms change. Optional units : * Toe aspirator at loading station * Basket programmable for tights gathering * Tights exit on stacking belt

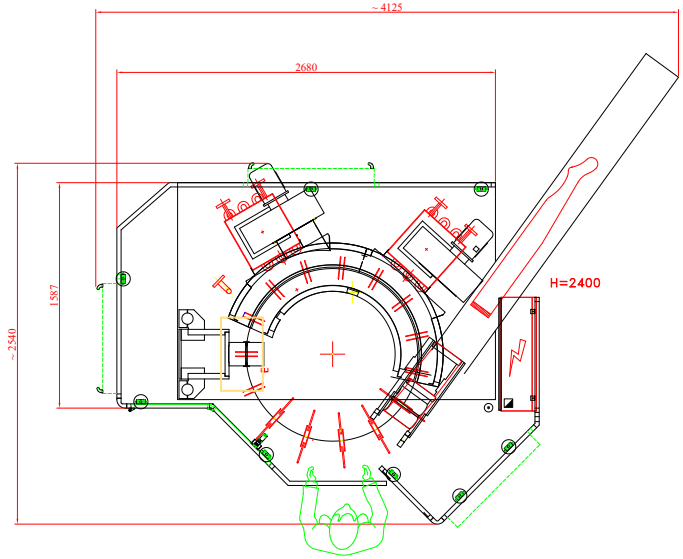

Dati Tecnici :	
Velocità ciclo Massimo:	5 secondi
Tensione alimentazione:	400V 50Hz
Potenza installata:	Kw 5
Consumo aria compressa:	80 NLT / min
Pressione aria compressa:	5 Bar
Consumo vapore:	40 /120 Kg/h
Pressione vapore in camera:	Max 3,0 Bar
Alimentazione vapore :	6 / 8 Bar
Peso:	Kg. 2500
Dimensione massima calza :	Mm 1340

Technical Data :	
Max cycle speed:	5 seconds
Power supply:	400V 50Hz
Installed power:	Kw 5
Air consumption:	80 NLT / min
Air pressure:	5 Bar
Steam consumption:	40 /120 Kg/h
Steam pressure in chamber:	Max 3,0 Bar
Steam supply :	6 / 8 Bar
Weight:	Kg. 2500
Max pantyhoses dimension :	Mm 1340

Tinarelli srl – 5° Stampa – Gennaio 2018